

Archivo preparado por: Katherina Pradenas / kpraden@vspt.cl

COLOCAR VARIABLE SEGÚN OC

GA(*)	GA+	COSECHA (a)				
11	N1	N2	N3	N4	N5	
11.5	O1	O2	O3	O4	O5	
12	P1	P2	P3	P4	P5	
12.5	Q1	Q2	Q3	Q4	Q5	
13	R1	R2	R3	R4	R5	
13.5	S1	S2	S3	S4	S5	
14	T1	T2	T3	T4	T5	
14.5	U1	U2	U3	U4	U5	
15	V1	V2	V3	V4	V5	
15.5	W1	W2	W3	W4	W5	
16	X1	X2	X3	X4	X5	


2022
2023
2024
2025



750ml - XX,X%Vol.

750ml - 12%Vol.
750ml - 12,5%Vol.
750ml - 13%Vol.
750ml - 13,5%Vol.
750ml - 14%Vol.
750ml - 14,5%Vol.

Aplicación Barniz Serigráfico
Esc.: 50%

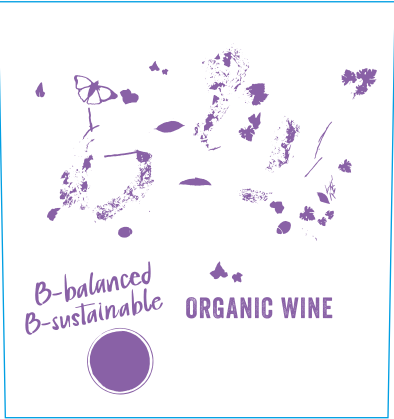

45 mm APROX

Medidas (ancho x alto)	105 x 110 mm
Papel	WOODSTOCK BETULLA FSC / SH9020 / PET30 (Fedrigoni)
Barniz	UV Mate
Impresión y Pegado	Offset Rot. /Flexo/Autoadhesiva
Sentido de salida	AISA 3 (Molina) / AISA 4 (Isla de Maipo)
Diámetro rollo	350mm +/- 10mm (aplicando redondeo de cantidades)
Paso etiquetas/contras	entre 3 y 4,5 mm
	NUNCA inferior a 3mm

Colores



CMYK



P 676 U
(Pantone de Referencia)



P 583 U

Recursos



Barniz serigráfico
con volumen