


Archivo preparado por: Kristell Redenz / kredenz@vps.pt.cl

PARA USO INTERNO
TIV: VO2AT00101

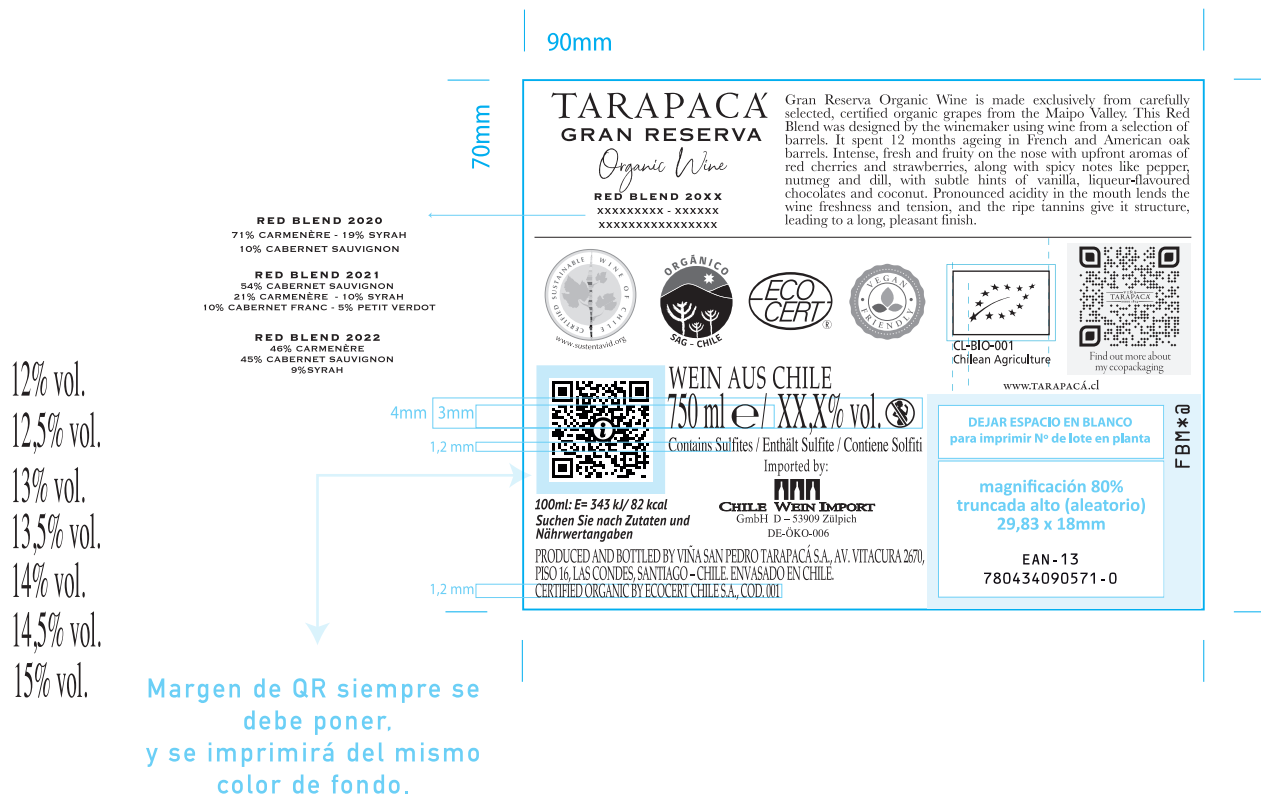

COLOCAR VARIABLE SEGÚN OC

GA(*)	GA+	COSECHA (@)				
11	N0	N1	N2	N3	N4	N5
11.5	O0	O1	O2	O3	O4	O5
12	P0	P1	P2	P3	P4	P5
12.5	Q0	Q1	Q2	Q3	Q4	Q5
13	R0	R1	R2	R3	R4	R5
13.5	S0	S1	S2	S3	S4	S5
14	T0	T1	T2	T3	T4	T5
14.5	U0	U1	U2	U3	U4	U5
15	V0	V1	V2	V3	V4	V5
15.5	W0	W1	W2	W3	W4	W5
16	X0	X1	X2	X3	X4	X5

Medidas (ancho x alto)	90 x 70 mm.
Papel	WOODSTOCK BETULLA SH-6020 PLUS CB62
Papel Sustituto	ESTATE 8 (SIMULADO)
Barniz	UV Mate
Impresión y Pegado	Flexo / Offset Rot. / Autoadhesiva
Sentido de salida	AISA 3 (Molina) / AISA 4 (Isla de Maipo)
Diámetro máximo rollo	350mm +/- 10mm (aplicando redondeo de cantidades)
Paso etiquetas/contras	entre 3 y 4,5 mm NUNCA inferior a 3mm

Colores  Negro  NO IMPRIMIR